


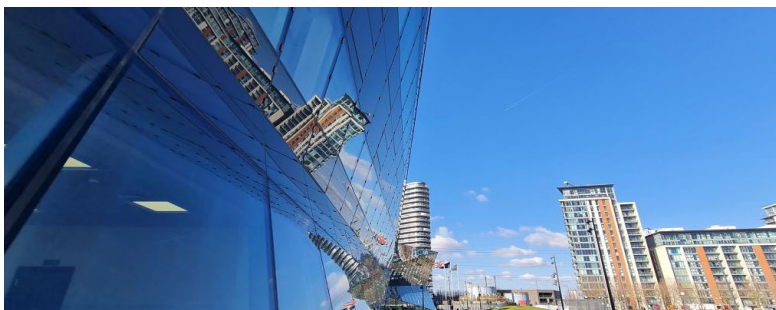

TECHNICAL DATA SHEET

CI/SfB

76.7

SOLAR CONTROL FILM

10100 SERIES INTERNAL SILVEROUT FILM

The film is to be installed to the interior surface of the glass, and the unique product roll numbers used are to be registered in accordance with the manufacturer's warranty procedure.

NOTES

Test results are produced from film applied to clear glass. Performance data is subject to change without prior notice. Accurate selection of window film requires specialist knowledge, and it is recommended that specifiers contact the company at the specification stage. It is the users' responsibility to ensure the product is suitable for the intended use. The seller shall not be liable for any direct or consequential loss howsoever arising.

PERFORMANCE DATA

TOTAL SOLAR ENERGY	Transmitted	0%
	Reflected	92%
	Absorbed	8%
VISIBLE LIGHT	Transmitted	<1%
	Reflected	92%
	Ultra-Violet Rejected	99%
	Glare Reduction	99%
	Shading Coefficient	0.04
	Total Solar Energy Rejected	98%



For specifications and drawings please visit our website www.interlaceblinds.com

Call InterLace sales office on **0800 619 6999** to order samples or email your requirements to sales@interlaceblinds.com

INTERLACE WARRANTY

Solar control films are covered against defective manufacturing for 12 months from the date of installation. This warranty does not cover misuse, damage caused after installation, or vandalism. InterLace liability is limited to the replacement of defective products like for like only. InterLace is committed to a program of continuous product improvement. Please be advised that specifications, performance, appearance, and dimensions of InterLace products are subject to change without notice. InterLace reserves the right to the final decision in the event of any warranty claim.



INTERLACE
EST. 1976

InterLace® Blinds Ltd, Cambridge CB21 4XN | T: 0800 619 6999 | sales@interlaceblinds.com | www.interlaceblinds.com