


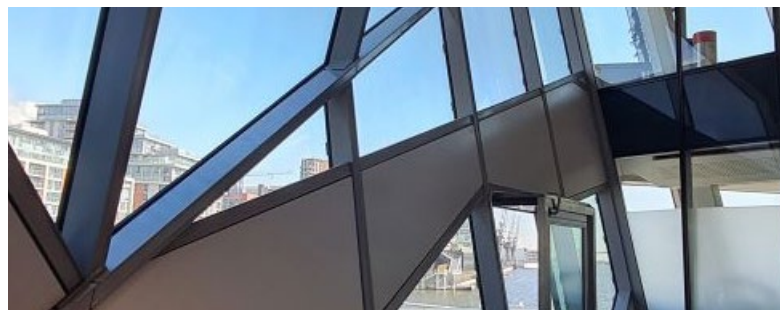

TECHNICAL DATA SHEET

CI/SfB

76.7

PRIVACY & DECORATIVE FILM

10100 SERIES INTERNAL WHITEOUT FILM

10100 Series Internal Whiteout Films are used to give two-way 24-hr privacy, particularly when low light transmissions are required. This film has a satin white finish and can be applied to most new or existing glass.

The 10100 Series Internal Whiteout Film is a quick and easy solution for installations where all vision through the glass needs to be controlled but where a small proportion of natural light is required. This product has been successfully used where a white appearance is required to create a lighter atmosphere than a blackout however vision and light needs to be controlled. This whiteout film offers 24-hr privacy and blocks out most daylight or artificial light through the window or lightbox, and has an opaque appearance. This blackout product also provides additional benefits, such as uniform outside appearance, and as with most InterLace films up to 99% ultra-violet light (UV) filtering.

FEATURES

- Low light transmission
- Quick, retro-fit installation
- Maximum Glare Rejection
- Screening of harmful UV rays

BENEFITS

- Prevents vision through the glass both ways, increasing security and privacy
- Introduce screening and privacy when and where it is required; ideal for glazing in rooms with a temporary change of use
- Reduces the premature fading of interior furnishings
- Helps alleviate the discomfort caused by excessive glare



For specifications and drawings please visit our website www.interlaceblinds.com

INTERLACE WARRANTY

Privacy and decorative films are covered against defective manufacturing for 12 months from the date of installation. This warranty does not cover misuse, damage caused after installation, or vandalism.

InterLace liability is limited to the replacement of defective products like for like only. InterLace is committed to a program of continuous product improvement.

Please be advised that specifications, performance, appearance, and dimensions of InterLace products are subject to change without notice. InterLace reserves the right to the final decision in the event of any warranty claim.

PERFORMANCE DATA

SOLAR ENERGY	Transmitted	9%
	Reflected	49%
	Absorbed	42%
VISIBLE LIGHT	Transmitted	7%
	Reflected (Interior)	N/A
	Reflected (Exterior)	59%
UV Rejection	99%	
Glare Reduction	92%	
Shading Coefficient	0.24	
Solar Heat Gain Coefficient (G-Value)	0.21	
U-Value (W/m ² K)	6.07	
Total Solar Energy Rejected	79%	
Product Warranty	12 months	

PHYSICAL PROPERTIES

Material	PET
Liner	Silicone Coated PET
Structure	N/A
Adhesive Type	Acrylic
Suitable for plotter-cutting graphics	No

NOTES

Test results are produced from film applied to 3mm clear single glass. Performance data is subject to change without prior notice. Accurate selection of window film requires specialist knowledge, and it is recommended that specifiers contact the company at the specification stage. It is the users' responsibility to ensure the product is suitable for the intended use. The seller shall not be liable for any direct, indirect or consequential loss or damage howsoever arising.

SPECIFICATION

The film is to be installed to the interior surface of the glass, and the unique product roll numbers used are to be registered in accordance with the manufacturer's warranty procedure.



INTERLACE

EST. 1976

Call InterLace sales office on **0800 619 6999** to order samples or email your requirements to sales@interlaceblinds.com

InterLace® Blinds Ltd, Cambridge CB21 4XN | T: 0800 619 6999 | sales@interlaceblinds.com | www.interlaceblinds.com