


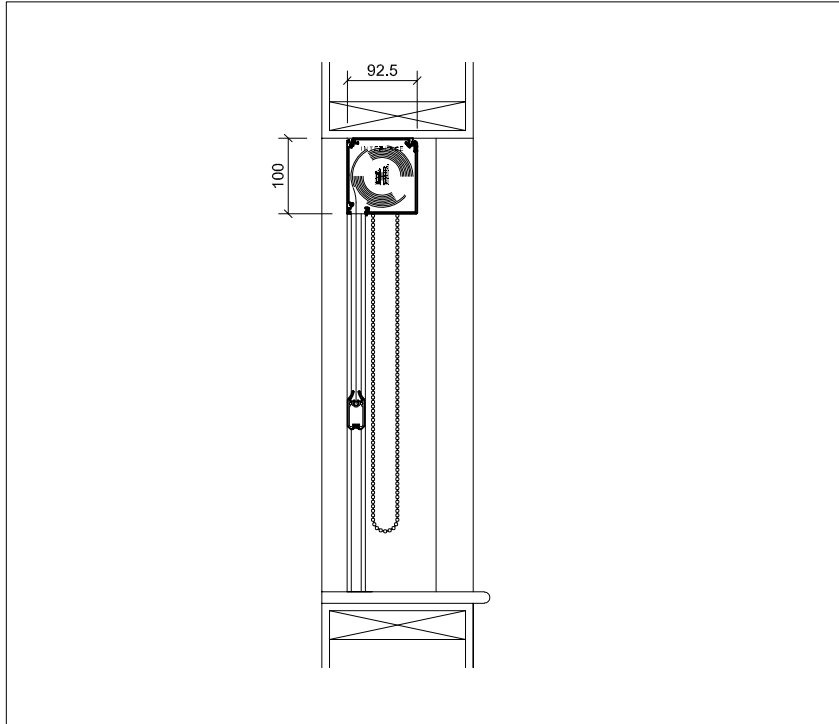


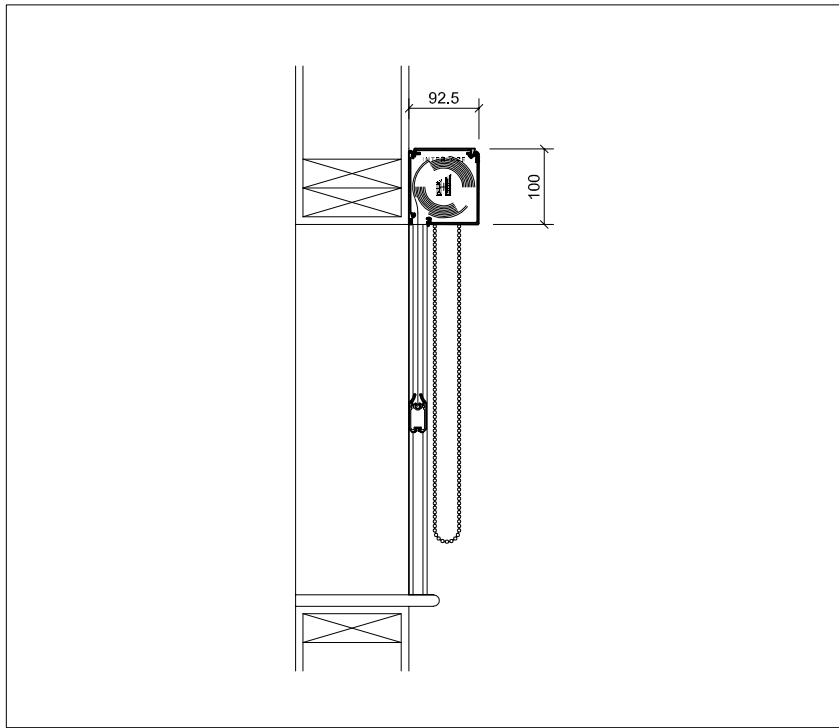


01 - REVEAL FIX CONFIGURATION - SECTION

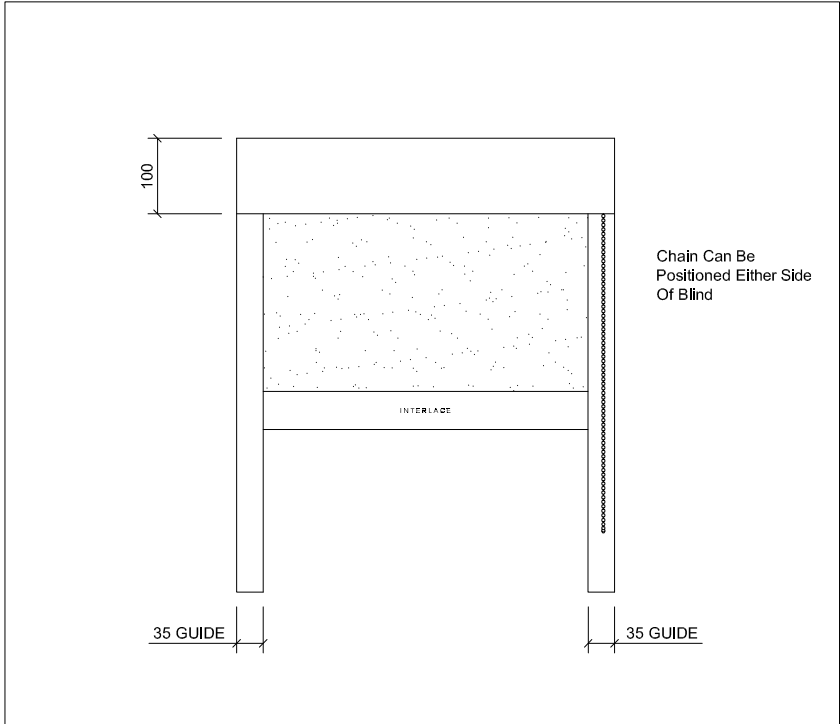

03 - FACE FIX CONFIGURATION - SECTION

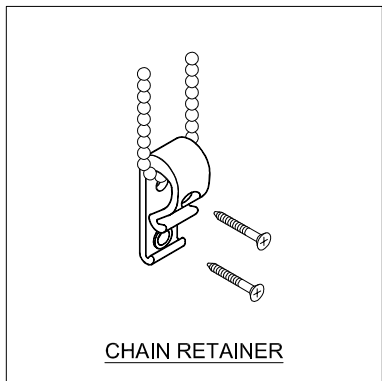

02 - TYPICAL ELEVATION

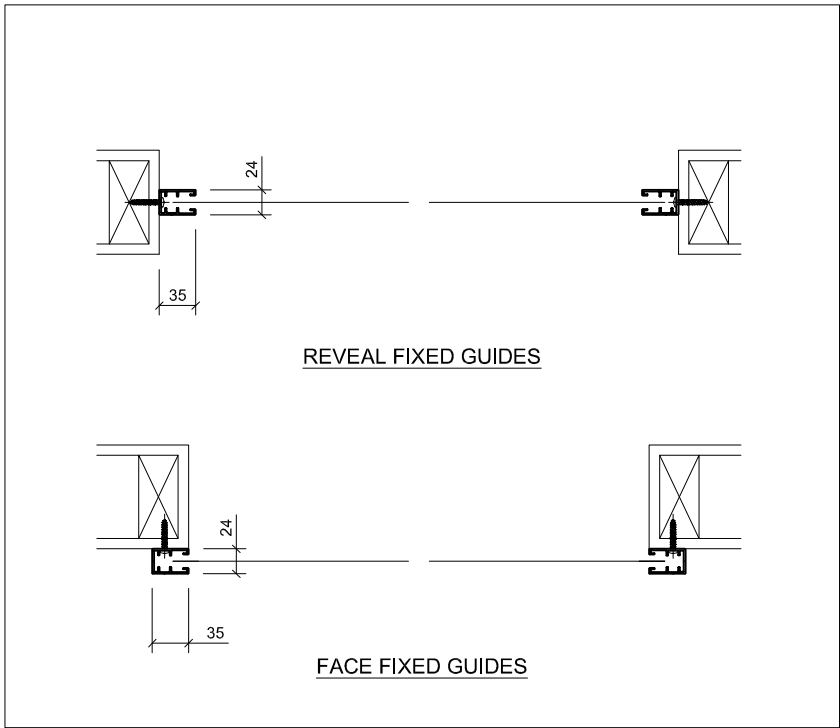


04 - PLAN SECTIONS THROUGH GUIDES

SYSTEM MAXIMUM DIMENSIONS	
MAXIMUM WIDTH	2600mm
MAXIMUM DROP	2600mm
MAXIMUM AREA (Standard Fabric)	5m2
Note : Maxlimum dlmslons quoted are dependant on the exact weight of the fabric specified	
Note - To Achieve a high level of blackout it may be necessary to add a silicon bead around the blind to allow for any Imperfections In the surrounding structure.	
Note - To Achieve a high level of blackout it may be necessary to add a silicon bead around the blind to allow for any imperfections in the surrounding structure.	

© This drawing is copyright of InterLace Blinds Limited and must not be reproduced whole or in part without prior written consent.		
Revision	Description	Date
00	Initial Issue	01.08.22
GENERAL Blind sections and elevations are indicative of blind system type and dimensions. InterLace reserve the right to alter products without notice on the basis of continuous improvement. TOLERANCE Please note that tolerance must be allowed on any dimensions given to take any potential variations in manufacturing and other conditions into account. COLOURS Please contact InterLace for any requests for colour swatches or samples. CUSTOM METAL COLOURS Most metal parts can be custom colour coated to an RAL reference using a polyester powder coating. Please check compatibility before specifying. AUTOMATION CONTROLS Requirements for controls are indicative only. Please contact InterLace for specific advice on control installations. WIRING All wiring Including cabling, containment and connections Is assumed to be project specific and by others and is not included within any generic recommendations made. FIXING This drawing does not take individual fixing situations into account. InterLace are not responsible for the substrate provided.		
Dimensions in millimetres unless stated otherwise. Dimensions may vary from this drawing including fabric gaps and bracket dimensions due to the nature of the products. Do NOT scale from this drawing, if in doubt please ask.		

This product must be installed in accordance with Child Safety Legislation EN13120. Please refer to the legislation for full details and guidance on individual situations. In particular (but not exclusively) any public area, residential area and educational establishments of all types, or any areas where the blind is intended to be installed in premises where children 0-42 months are likely to have access or be present, the blind installation must meet EN13120. InterLace should be consulted and allowed to advise how to comply through the use of various chain safety devices. Where the blind is intended to be installed in premises where children 0-42 months are not likely to have access or be present, the blind installation must be risk assessed as such with supporting documentation and be accompanied with the appropriate 'child safety compliance not required' notice.

Drawing Title		
4100 SERIES MANUAL BLACKOUT ROLLER BLIND CHAIN OPERATION		
Date	Scale(s)	
N.T.S.	01.08.22	
Drawn By	Checked By	Approved By
DK	MW	
Drawing No	Rev	
BLB020_4100	00	



INTERLACE

EST 1976

Unit 6 - The Grip Industrial Estate
Linton
Cambridge
CB21 4XN

T 0800 619 6999
E sales@interlaceblinds.com
W www.interlaceblinds.com