

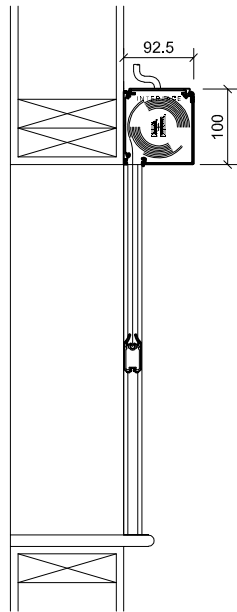
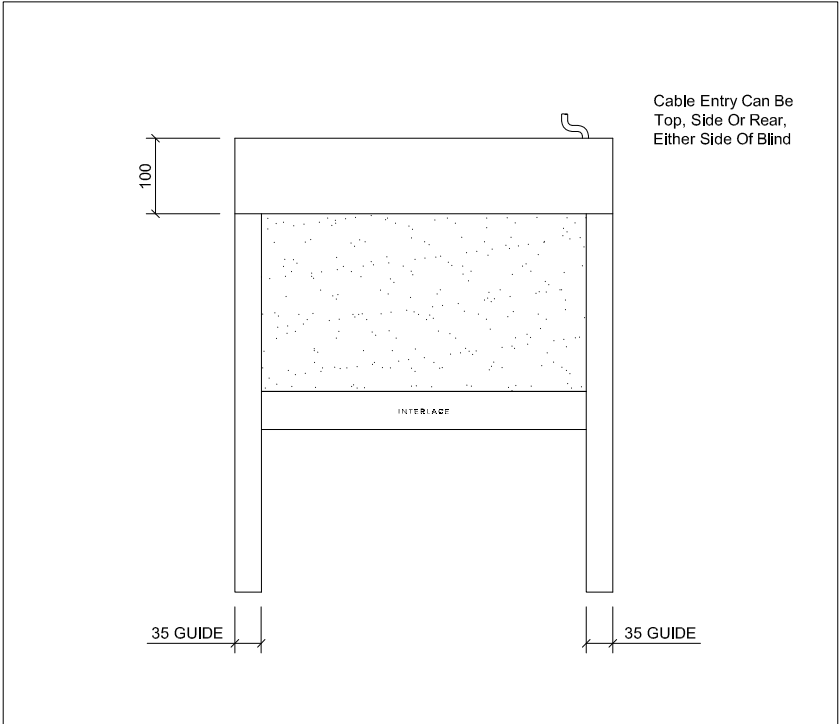
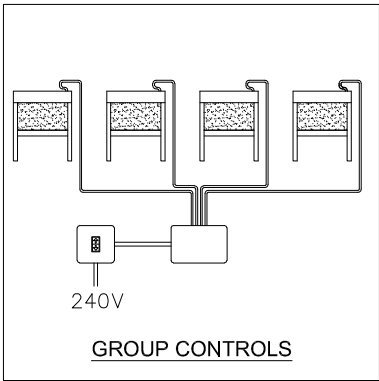



01 - REVEAL FIXED CONFIGURATION - SECTION

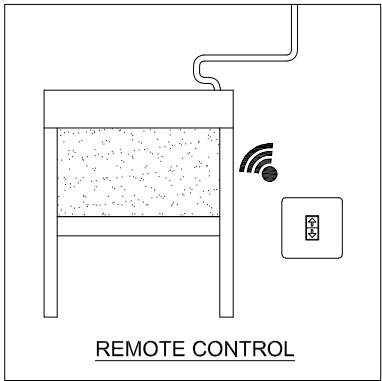

03 - FACE FIXED CONFIGURATION - SECTION

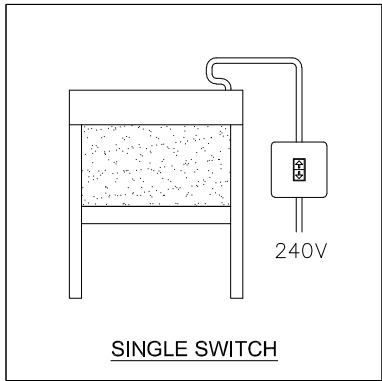

02 - TYPICAL ELEVATION

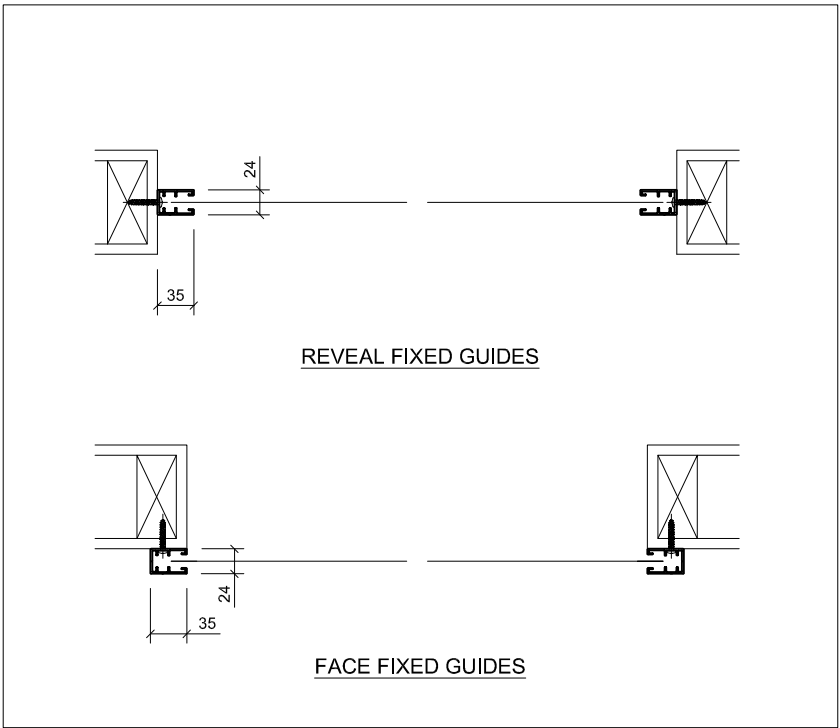

04 - PLAN SECTIONS THROUGH GUIDES

| SYSTEM MAXIMUM DIMENSIONS                                                                  |        |
|--------------------------------------------------------------------------------------------|--------|
| MAXIMUM WIDTH                                                                              | 2800mm |
| MAXIMUM DROP                                                                               | 2400mm |
| MAXIMUM AREA (Standard Fabric)                                                             | 5.5m2  |
| Note : Maximum dimensions quoted are dependant on the exact weight of the fabric specified |        |

© This drawing is copyright of InterLace Blinds Limited and must not be reproduced whole or in part without prior written consent.

| Revision | Description   | Date     |
|----------|---------------|----------|
| 00       | Initial Issue | 01.08.22 |
|          |               |          |
|          |               |          |


**GENERAL**  
Blind sections and elevations are indicative of blind system type and dimensions. InterLace reserve the right to alter products without notice on the basis of continuous improvement.  
**TOLERANCE**  
Please note that tolerance must be allowed on any dimensions given to take any potential variations in manufacturing and other conditions into account.  
**COLOURS**  
Please contact InterLace for any requests for colour swatches or samples.  
**CUSTOM METAL COLOURS**  
Most metal parts can be custom colour coated to an RAL reference using a polyester powder coating. Please check compatibility before specifying.  
**AUTOMATION CONTROLS**  
Requirements for controls are indicative only. Please contact InterLace for specific advice on control installations.  
**WIRING**  
All wiring including cabling, containment and connections is assumed to be project specific and by others and is not included within any generic recommendations made.  
**FIXING**  
This drawing does not take individual fixing situations into account. InterLace are not responsible for the substrate provided.

Dimensions in millimetres unless stated otherwise. Dimensions may vary from this drawing including fabric gaps and bracket dimensions due to the nature of the products. Do NOT scale from this drawing, if in doubt please ask.

Note - To Achieve a high level of blackout It may be necessary to add a silicon bead around the blind to allow for any Imperfections In the surrounding structure.

Drawing Title  
**4100 SERIES BLACKOUT  
ROLLER BLIND  
MOTORISED OPERATION  
240V**

|                                  |                             |                  |
|----------------------------------|-----------------------------|------------------|
| Date<br><b>N.T.S.</b>            | Scale(s)<br><b>01.08.22</b> |                  |
| Drawn By<br><b>DK</b>            | Checked By<br><b>MW</b>     | Approved By      |
| Drawing No<br><b>BLB040_4100</b> |                             | Rev<br><b>00</b> |



**INTERLACE**  
EST 1976

Unit 6 - The Grip Industrial Estate  
Linton  
Cambridge  
CB21 4XN

**T** 0800 619 6999  
**E** sales@interlaceblinds.com  
**W** www.interlaceblinds.com