

INTERLACE

EST. 1976

BLIND FABRIC SELECTOR

OBSKUR FR™

OPAQUE | BLACKOUT



ROLLER



VERTICAL



BLACKOUT

OBSKUR FR™ FABRIC SPECIFICATION

Obskur FR™ is an advanced flame retardant technical fabric designed for complete light exclusion. The soft touch fabric and tough nature of it suit it to a rigorous commercial environment. This is used on roller blinds to provide a dim-out of around 80% or on a framed roller blind to give 99% blackout.

A full range of colours and coordinated colours with the Opto FR™ solar shading fabric makes this range ideal for specification and use across a broad scope of projects, particularly:

- Commercial offices
- Schools and Colleges
- Healthcare

Fabric composition	100% Polyester
Louvre widths	89 mm (3.5")
Roller fabric width	2500 & 3000 mm
Fabric thickness	0.39 mm +/-
Fabric weight	320 +/-
Light fastness	6-7 Grade
Fire retardancy	Conforms to BS5867, Part 2: Type B 2008
Shading screen type	Dim-out. Suitable for environments using computers and audio visual equipment
Moisture resistance	Suitable for moist conditions
Care instructions	Remove dust from the fabric surface, then wipe gently with a damp soft sponge with mild detergent

Please note that 90% + blackout can only be achieved when this fabric is used with the correct blackout blind system.

Please note images are only indicative of appearance and performance and fabrics may not appear or perform the same in every situation and should always be tested with samples.



Obskur FR White on 3000 Series Roller Blind



HANDY TIP!

The characteristics and performance of the blinds does not particularly depend on the colour chosen from this range. Darker colours will reduce internal reflection of stray light, but they absorb and transmit heat more than lighter colours. Lighter colours are excellent at rejecting heat but under bright conditions can sometimes give a slight shadow through the fabric.



FABRIC SAMPLES

Would you like a physical sample of any of these colours? Please call us on 0800 619 6999 and we will be pleased to arrange or visit www.interlace.com/freesample-request/


Shading Efficiency


TRANSMITTANCE is the amount of light and heat transmitted beyond the fabric. The lower the amount, the greater the efficiency.

BLOCK/REFLECT is the amount of heat and light that is blocked or reflected. The higher the amount, the greater the efficiency.


ABSORPTION is the amount of heat and light absorbed in the fabric. The higher the amount, the lower the efficiency.

ULTRAVIOLET protection illustrates how protective the fabric is in protecting against ultraviolet rays. The higher the amount, the greater the effectiveness.

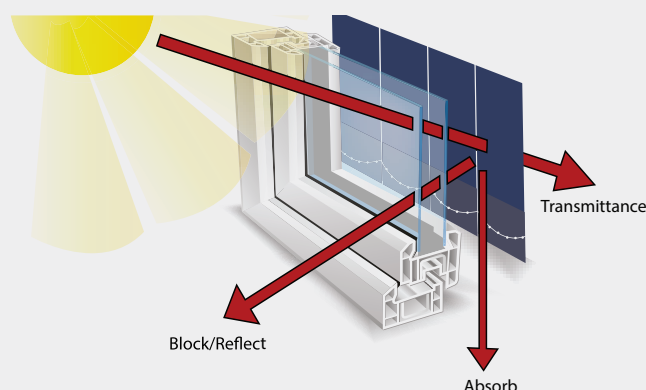

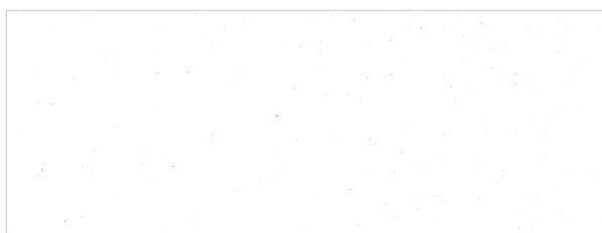


WHITE

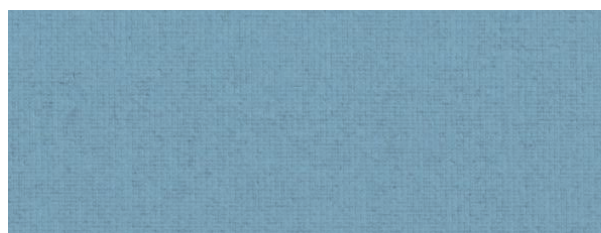

SKY



CREAM

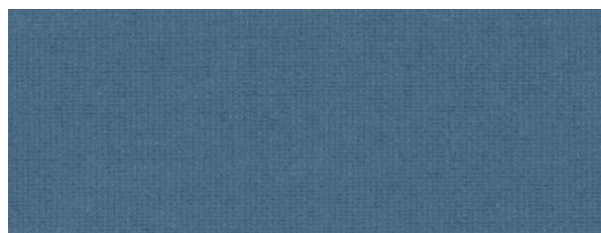


NAVY BLUE




LIGHT GREY




RED

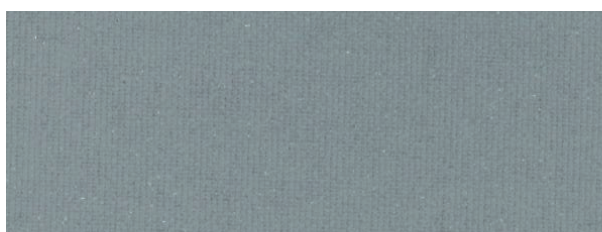

GRANITE

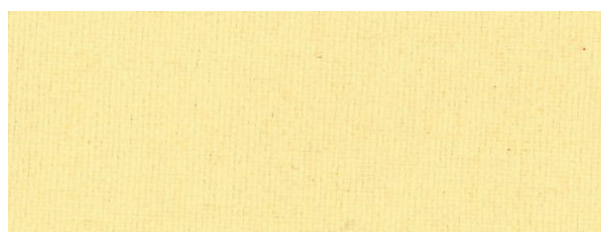

VANILLA

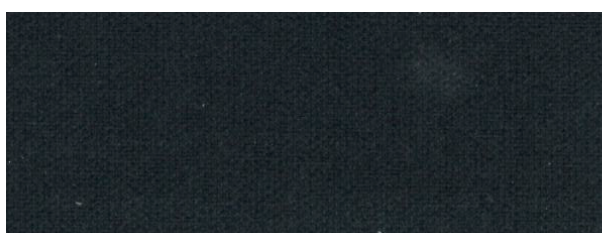

BLACK



SAND


OBSKUR FR™ FABRIC SPECIFICATION

	%Ts	%Rs	%As	Colour fastness
WHITE	o	82	18	7
CREAM	o	82	18	>6
LIGHT GREY	o	82	18	>6
GRANITE	o	82	18	>6
BLACK	o	82	18	>6
SKY	o	82	18	>6
NAVY BLUE	o	82	18	>6
RED	o	82	18	7
STRAW	o	82	18	>6
SAND	o	82	18	>6



HANDY TIP!

Horizontal fabric joins will be introduced where both dimensions of a blind exceed the maximum usable width of the fabric. The joins will normally be situated as near to the top of the blind as possible. Joins are visible and are either stitched or heat welded.



INTERLACE
EST. 1976

InterLace® reserve the right to change colours without notice as colours may become obsolete, discontinued or only compatible with particular blind systems.

If in doubt, please request stock cuttings of fabrics before production.

Please note that colours viewed on screen will appear different to the actual product.

InterLace® Blinds Ltd, Unit 6 The Grip Industrial Estate, Linton, Cambridge CB21 4XN
T: 0800 619 6999 | sales@interlaceblinds.com | www.interlaceblinds.com