

INTERLACE

EST. 1976

BLIND FABRIC SELECTOR

**SPEKTRO
NIGHT FR™**

OPAQUE | BLACKOUT



ROLLER



VERTICAL



BLACKOUT

SPEKTRO NIGHT FR™ FABRIC SPECIFICATION

Spektro Night FR™ is an attractive fabric with a colour matching blackout backing across a very broad colour range and matches to the Spektro Day FR™ shading fabric range so they can be combined in the same areas.

It is fire retardant, odourless and colour fast, and reliable enough for the most demanding residential and commercial environments.

- Residential apartments
- AV rooms and boardrooms
- Laboratories and school science and drama rooms
- Medical and healthcare institutions

Fabric composition	100% Polyester
Louvre widths	127mm (5") / 89mm (3.5")
Roller fabric width	2000mm / 2500mm available in some options
Fabric thickness	0.48mm
Fabric weight	390g/m ²
Fire retardancy	Conforms to BS5867 Part 2, Type B 2008
Shading	Blackout. Suitable for computer environments.
Moisture resistance	Suitable for moist conditions
Colourfast	Conforms to BS5867 - 1: 2004 for light-fastness when tested in accordance with ISO 105-B02:1999
Care instructions	Wipe with damp sponge; Do not tumble dry; Do not dry clean; Do not iron.



Spektro Night FR White on 3000 Series Roller Blind



HANDY TIP!

Horizontal fabric joins will be introduced where both dimensions of a blind exceed the maximum usable width of the fabric. The joins will normally be situated as near to the top of the blind as possible. Joins are visible and are either stitched or heat welded.

If you need advice in specifying or have a particular query that we may be able to help with, call the InterLace sales office on 0800 619 6999 for advice or email your requirements to sales@interlaceblinds.com.

Please note that 90% + blackout can only be achieved when this fabric is used with the correct blackout blind system.

Please note images are only indicative of appearance and performance and fabrics may not appear or perform the same in every situation and should always be tested with samples.


Shading Efficiency


TRANSMITTANCE is the amount of light and heat transmitted beyond the fabric. The lower the amount, the greater the efficiency.

BLOCK/REFLECT is the amount of heat and light that is blocked or reflected. The higher the amount, the greater the efficiency.

ABSORPTION is the amount of heat and light absorbed in the fabric. The higher the amount, the lower the efficiency.

ULTRAVIOLET protection illustrates how protective the fabric is in protecting against ultraviolet rays. The higher the amount, the greater the effectiveness.

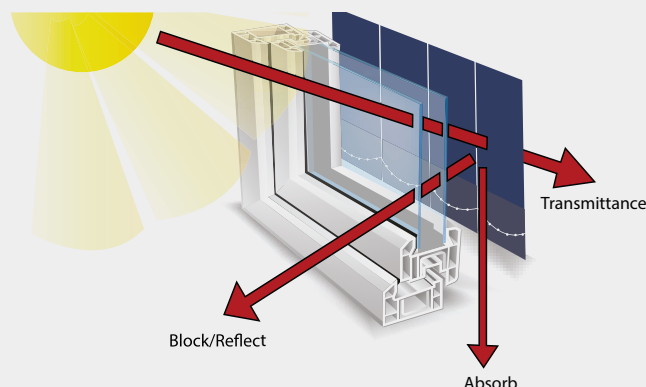



WHITE




ROSE



PINK



CHERRY



CREAM



CHOCOLATE



SCARLET



IVORY



PLUM



TANGERINE



MAGNOLIA



LILAC




SUNSHINE



TAUPE



DUSTY PINK



PRIMROSE



APPLE



COOL BLUE



MARSH



ASH



PINE GREEN



TOASTY GREY



OXFORD BLUE



GREY



ADMIRAL



STATE




TURQUOISE



GRAPHITE



DENIM



ONYX



HANDY TIP!

The characteristics and performance of the blinds does not particularly depend on the colour chosen from this range as it is an opaque blackout fabric. Darker colours will tend to reduce internal reflection of stray light coming around the edge of the blind, but they absorb and transmit heat more than lighter colours. Lighter colours are excellent at rejecting heat but under bright conditions can sometimes give a slight reflectance of stray light.

SPEKTRO NIGHT FR™ FABRIC SPECIFICATION

	2500 mm	2000 mm	127mm / 89 mm	Heat Transmittance %	Light Transmittance %	Shading Co-efficiency	Light Reflection %	Sun Block & UV Protection %	Absorption %	Heat Reflection %
WHITE				0	0	0.30	85	100	25	75
CREAM				0	0	0.34	77	100	31	69
IVORY				0	0	0.35	69	100	33	67
MAGNOLIA				0	0	0.34	74	100	31	69
TAUPE				0	0	0.51	32	100	59	41
CHOCOLATE				0	0	0.66	14	100	85	15
PLUM				0	0	0.49	12	100	55	45
LILAC				0	0	0.43	32	100	46	54
DUSTY PINK				0	0	0.42	47	100	44	56
ROSE				0	0	0.37	62	100	36	64
PINK				0	0	0.42	28	100	45	55
CHERRY				0	0	0.61	11	100	76	24
SCARLET				0	0	0.46	18	100	52	48
TANGERINE				0	0	0.45	29	100	50	50
SUNSHINE				0	0	0.39	70	100	40	60
PRIMROSE				0	0	0.35	76	100	33	67
APPLE				0	0	0.41	62	100	43	57
MARSH				0	0	0.52	25	100	61	39
PINE GREEN				0	0	0.55	14	100	66	34
OXFORD BLUE				0	0	0.70	7	100	90	10
ADMIRAL				0	0	0.60	11	100	74	26
TURQUOISE				0	0	0.50	27	100	58	42
DENIM				0	0	0.59	21	100	72	28
COOL BLUE				0	0	0.39	52	100	40	60
ASH				0	0	0.38	56	100	39	61
TOASTY GREY				0	0	0.49	49	100	56	44
GREY				0	0	0.59	31	100	72	28
STATE				0	0	0.62	24	100	78	22
GRAPHITE				0	0	0.69	13	100	88	12
ONYX				0	0	0.72	7	100	93	7

UV Protection factor: H = High M = Maximum. Shading Co-efficiency is tested using a single 6mm glass glazing system with and without a blind to obtain solar heat gain measurements. The lower the result the better the performance of the blind at blocking solar heat.

InterLace® reserve the right to change colours without notice as colours may become obsolete, discontinued or only compatible with particular blind systems.

If in doubt, please request stock cuttings of fabrics before production.

Please note that colours viewed on screen will appear different to the actual product.



INTERLACE
EST. 1976

InterLace® Blinds Ltd, Unit 6 The Grip Industrial Estate, Linton, Cambridge CB21 4XN
T: 0800 619 6999 | sales@interlaceblinds.com | www.interlaceblinds.com