


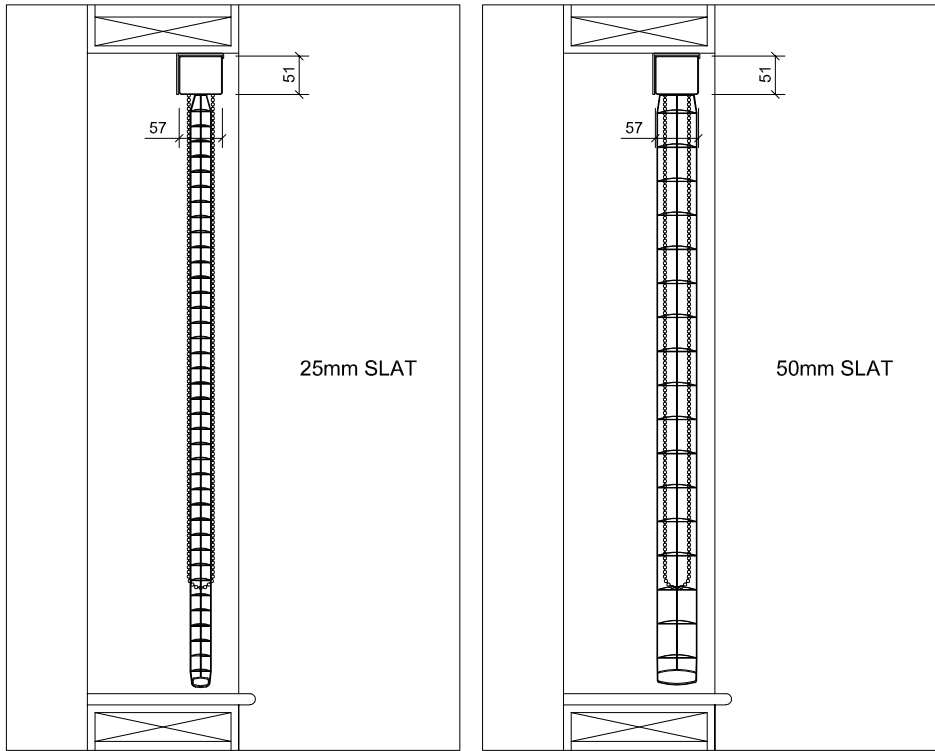
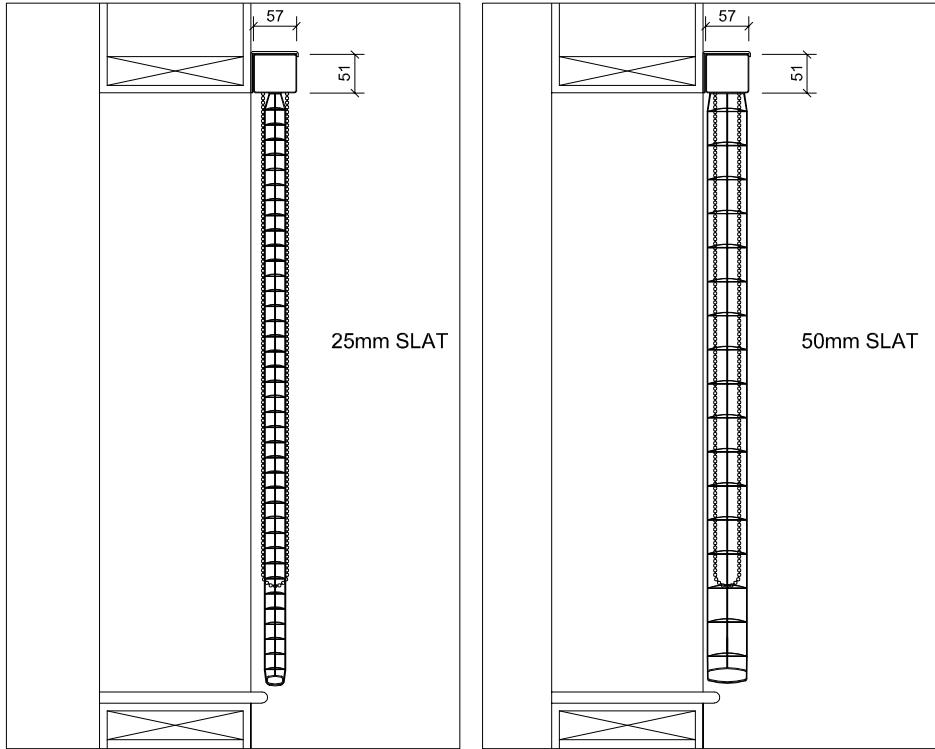
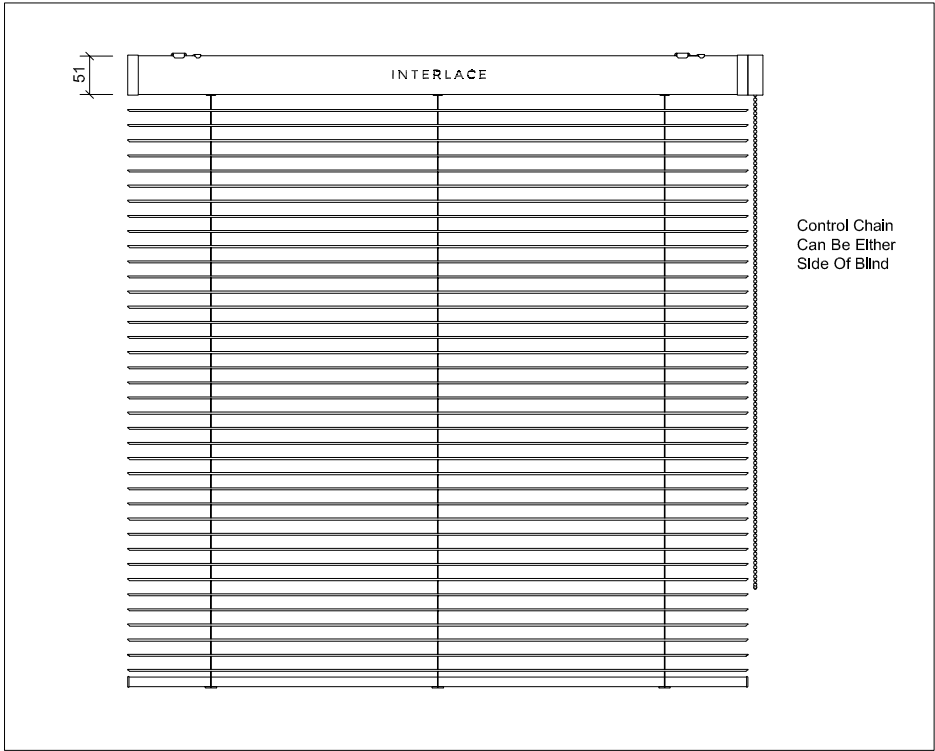


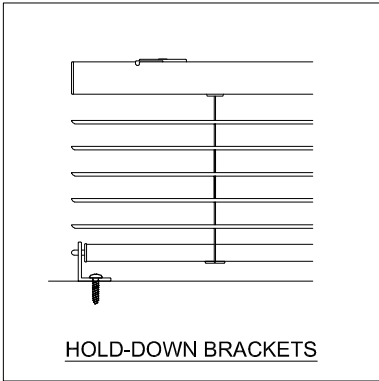


01 - TOP FIX CONFIGURATION - SECTION

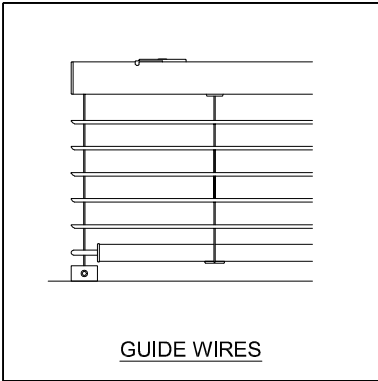

03 - FACE FIX CONFIGURATION - SECTION

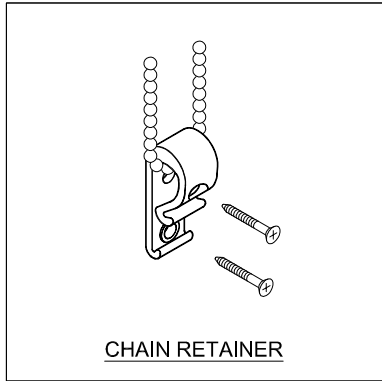

02 - TYPICAL ELEVATION - 25mm SLAT

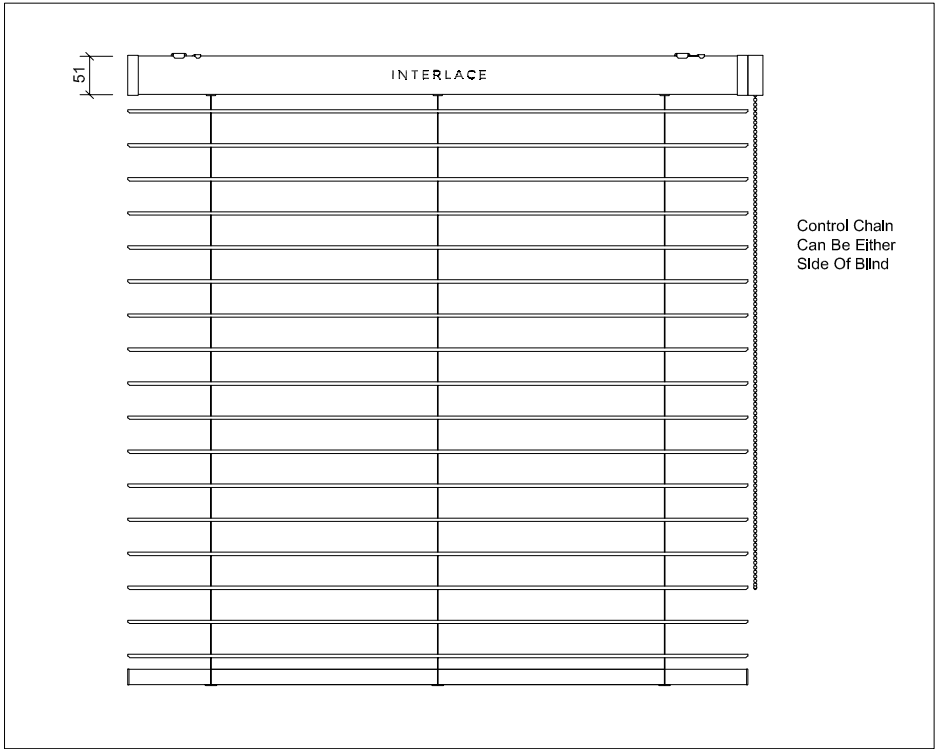

04 - TYPICAL ELEVATION - 50mm SLAT

SYSTEM MAXIMUM DIMENSIONS		
SLAT WIDTH	25mm	50mm
MAXIMUM WIDTH	3000mm	4500mm
MAXIMUM DROP	5000mm	5000mm
MAXIMUM AREA	9m2	10m2

© This drawing is copyright of InterLace Blinds Limited and must not be reproduced whole or in part without prior written consent.

Revision	Description	Date
00	Initial Issue	01.08.22


GENERAL
Blind sections and elevations are indicative of blind system type and dimensions. InterLace reserve the right to alter products without notice on the basis of continuous improvement.
TOLERANCE
Please note that tolerance must be allowed on any dimensions given to take any potential variations in manufacturing and other conditions into account.
COLOURS
Please contact InterLace for any requests for colour swatches or samples.
CUSTOM METAL COLOURS
Most metal parts can be custom colour coated to an RAL reference using a polyester powder coating. Please check compatibility before specifying.
AUTOMATION CONTROLS
Requirements for controls are indicative only. Please contact InterLace for specific advice on control installations.
WIRING
All wiring including cabling, containment and connections is assumed to be project specific and by others and is not included within any generic recommendations made.
FIXING
This drawing does not take individual fixing situations into account. InterLace are not responsible for the substrate provided.

Dimensions in millimetres unless stated otherwise. Dimensions may vary from this drawing including fabric gaps and bracket dimensions due to the nature of the products. Do NOT scale from this drawing. If in doubt please ask.

This product must be installed in accordance with Child Safety Legislation EN13120. Please refer to the legislation for full details and guidance on individual situations. In particular (but not exclusively) any public area, residential area and educational establishments of all types, or any areas where the blind is intended to be installed in premises where children 0-42 months are likely to have access or be present, the blind installation must meet EN13120. InterLace should be consulted and allowed to advise how to comply through the use of various chain safety devices. Where the blind is intended to be installed in premises where children 0-42 months are not likely to have access or be present, the blind installation must be risk assessed as such with supporting documentation and be accompanied with the appropriate 'child safety compliance not required' notice.

Drawing Title
**5000 SERIES VENETIAN BLIND
MANUAL MONO CHAIN OPERATION**

Date	Scale(s)	
N.T.S.	01.08.22	
Drawn By	Checked By	Approved By
DK	MW	
Drawing No	Rev	
VBNO50_5000	00	



INTERLACE

EST 1976

Unit 6 - The Grip Industrial Estate
Linton
Cambridge
CB21 4XN

T 0800 619 6999
E sales@interlaceblinds.com
W www.interlaceblinds.com