

INTERLACE

EST. 1976

BLIND FABRIC SELECTOR

VISION FR™

1%, 3%, 5%

SCREENING | SHADING



ROLLER



ROOFLIGHT

VISION FR™ FABRIC SPECIFICATION

Vision FR™ is an advanced flame retardant technical fabric designed for glare control rather than complete light exclusion. Through the screen-type construction it allows a view through and a connection between room users and the outside, enhancing the whole internal environment to which it is installed. It maximises the use of natural light by controlling the level of light transmission.

A full range of architectural colours makes this range suitable for specification and use across a broad scope of projects, particularly:

- Offices and Commercial
- Schools
- Healthcare

OPENNESS	1%	3%	5%
Fabric composition	PVC 75% Polyester 25%	PVC 75% Polyester 25%	PVC 75% Polyester 25%
Weave	67 X 51(±5%)	54 X 48 (±5%)	49 x 48 (±5%)
Roller fabric width	2500 & 3000mm	2500 & 3000mm	2500 & 3000mm
Fabric thickness	0.57mm	0.57mm	0.57mm
Fabric weight	520 g/m2	445 g/m2	415 g/m2
Fire retardancy	Conforms to BS5867, Part 2: Type B	Conforms to BS5867, Part 2: Type B	Conforms to BS5867, Part 2: Type B
Shading	Suitable for computer environments		
Moisture resistance	Suitable for moist conditions		
Colourfast	7-8 Grade	7-8 Grade	7-8 Grade
Care instructions	Remove dust, wipe clean with damp sponge and mild detergent		

Please note images are only indicative of appearance and performance and fabrics may not appear or perform the same in every situation and should always be tested with samples.



Vision FR Black/Black on 3000 Series Roller Blind



Vision FR White/White on 3000 Series Roller Blind



Vision FR external view night


Shading Efficiency


TRANSMITTANCE is the amount of light and heat transmitted beyond the fabric. The lower the amount, the greater the efficiency.

BLOCK/REFLECT is the amount of heat and light that is blocked or reflected. The higher the amount, the greater the efficiency.

ABSORPTION is the amount of heat and light absorbed in the fabric. The higher the amount, the lower the efficiency.


ULTRAVIOLET protection illustrates how protective the fabric is in protecting against ultraviolet rays. The higher the amount, the greater the effectiveness.

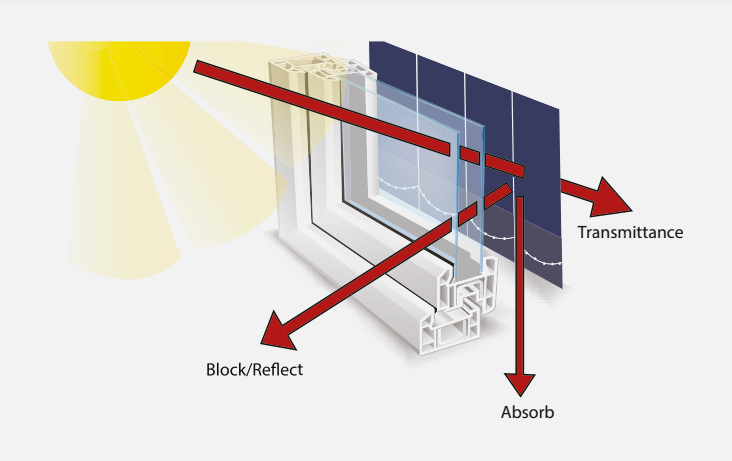

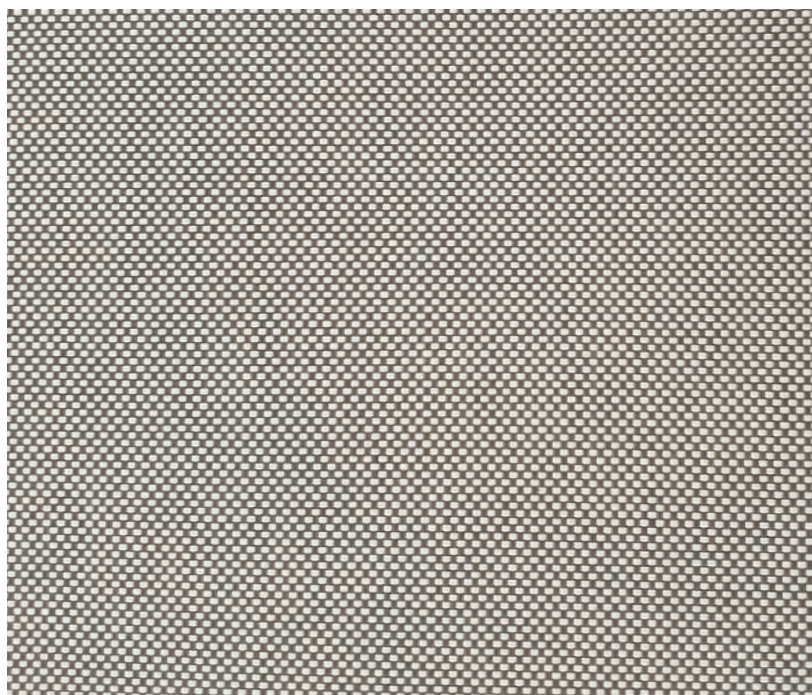

HANDY TIP!

The characteristics and performance of the blinds will greatly depend on the colour chosen. Darker colours are excellent at controlling glare and give a more enhanced view through the fabric due to the contrast in colour, but they absorb and transmit heat more than lighter colours. Lighter colours are excellent at rejecting heat but under bright conditions can appear more transparent and sometimes increase glare on computer screens.

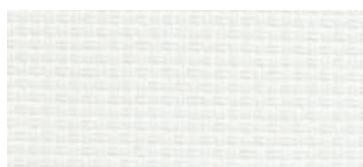


WHITE/WHITE




PEARL/PEARL



WHITE/LINEN

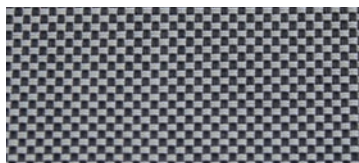

BLACK/PEARL

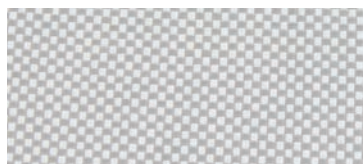

WHITE/PEARL



BLACK/BLACK



WHITE/GREY



FABRIC SAMPLES

Would you like a physical sample of any of these colours? Please call us on 0800 619 6999 and we will be pleased to arrange or visit www.interlace.com/free-sample-request/

VISION FR™ FABRIC SPECIFICATION

VISION SCREEN 1%

	Fabric			g ^{tot}			Optical factors	
	%Ts	%Rs	%As	A	B	C	Tv	Tuv
WHITE	15	67	18	0.32	0.30	0.29	10	3
WHITE/LINEN	13	72	15	0.37	0.36	0.34	9	3
WHITE/PEARL	7	51	42	0.44	0.42	0.40	6	3
WHITE/GREY	8	37	55	0.45	0.43	0.40	5	3
PEARL	6	37	57	0.45	0.43	0.40	4	2
BLACK/PEARL	2	10	88	0.60	0.58	0.51	2	1
BLACK	0.5	4	95.5	0.66	0.64	0.61	3	2

VISION SCREEN 3%

	Fabric			g ^{tot}			Optical factors	
	%Ts	%Rs	%As	A	B	C	Tv	Tuv
WHITE	17	65	18	0.32	0.30	0.29	10	3
WHITE/LINEN	16	55	29	0.37	0.36	0.34	9	3
WHITE/PEARL	10	43	47	0.44	0.42	0.40	6	3
WHITE/GREY	9	36	55	0.45	0.43	0.40	5	3
PEARL	7	31	62	0.45	0.43	0.40	4	2
BLACK/PEARL	3	15	82	0.60	0.58	0.51	2	1
BLACK	2	4	94	0.66	0.64	0.61	3	2

VISION SCREEN 5%

	Fabric			g ^{tot}			Optical factors	
	%Ts	%Rs	%As	A	B	C	Tv	Tuv
WHITE	20	66	14	0.30	0.30	0.28	12	4
WHITE/LINEN	19	56	25	0.36	0.36	0.31	13	6
WHITE/PEARL	12	44	44	0.42	0.41	0.34	9	5
WHITE/GREY	11	42	47	0.42	0.41	0.34	9	5
PEARL	9	32	59	0.49	0.47	0.37	7	5
BLACK/PEARL	6	16	78	0.57	0.55	0.41	6	5
BLACK	5	5	90	0.64	0.60	0.44	6	5

InterLace® reserve the right to change colours without notice as colours may become obsolete, discontinued or only compatible with particular blind systems.

If in doubt, please request stock cuttings of fabrics before production.

Please note that colours viewed on screen will appear different to the actual product.



INTERLACE
EST. 1976

InterLace® Blinds Ltd, Unit 6 The Grip Industrial Estate, Linton, Cambridge CB21 4XN
T: 0800 619 6999 | sales@interlaceblinds.com | www.interlaceblinds.com